



BULK SHRINK TUBE

PROFESSIONAL GRADE HI-TEMP SHRINK TUBES BULK ROLLS

Provides excellent electrical insulation, protection from dust, solvents and other foreign material as well as providing strain relief. Overexpanded tubing easily fits over the ends of wires and connectors and shrinks down to 33% of it's original diameter to fit snugly over wires and connectors for a water tight protective seal without reduction in tube length.

Hi-Temp shrink tubes can be used to insulate wires, connections, terminals and meets the material and functional properties of Mil spec DTL-23053/5C




- Offers a clean professional look
- Remains flexible
- Protection from moisture & other elements
- Meets MIL Spec DTL-23053/5C
- Thick wall structure
- Alternate to plastic ties & tape
- Easy to install: apply 120-187°F using heat gun
- Operating temp range: -67°F to 275°F
- Max operating temp: 394°F for short duration (30-60 min)
- 3 to 1 shrink ratio
- Corrosion & abrasion protection

GREAT TO HAVE IN THE SHOP AND ON HAND WHEN YOU NEED IT!

HI-TEMP SHRINK TUBES SPOOLS

Part #	Description
010850	9mm (3/8") x 50ft Spool
010851	12mm (1/2") x 50ft Spool
010852	18mm (11/16") x 50ft Spool
010853	24mm (1") x 50ft Spool
010854	3mm (1/8") x 50ft Spool
010855	6mm (1/4") x 50ft Spool
010832B200	9mm (3/8") 200ft spool
010833B200	12mm (1/2") 200ft spool
010834B200	18mm 11/16") 200ft spool
010835B200	24mm (1") 200ft spool
010837B500	3mm (1/8") 500ft spool
010838B200	6mm (1/4") 200ft spool

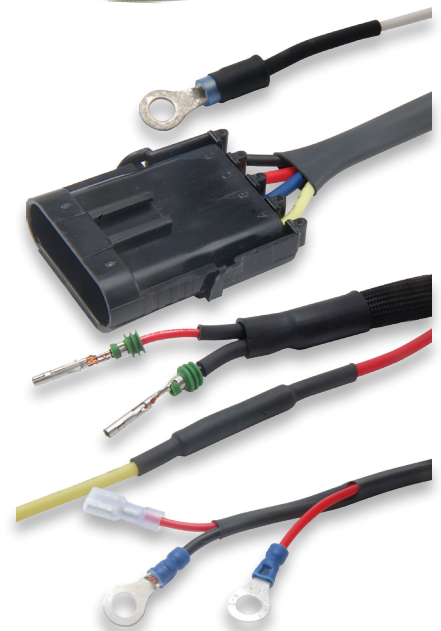

FOR MORE INFORMATION AND OUR COMPLETE PRODUCT LINE GO TO

DesignEngineering.com    

604 Moore Rd. Avon Lake, Ohio 44012
800-264-9472 • 440-930-7940 • (F) 440-930-7967
sales@designengineering.com