

## INSTALLATION INSTRUCTIONS

Thank you for purchasing genuine Design Engineering, Inc. products. Be sure to always wear the proper safety equipment when installing any DEI product. Design Engineering Inc. WILL NOT BE HELD LIABLE FOR IMPROPER INSTALLATION OR USE OF THIS PRODUCT. Please follow all instructions provided. If you are unsure of any installation procedure, please contact a certified technician.

**DESCRIPTION:** 2019 - UP 144" WB

Damping Kit Less Floor

**KIT CONTENTS:**

Pre-Cut Damping Material

**TOOLS NEEDED:**

Cleaner & Degreaser

Rags/Towels

Tools for interior panel removal

**SAFETY:**

Safety glasses

Gloves


**NOTE OF CAUTION:** Wear eye and hand protection when installing all materials. Use cleaners or degreasers in a well ventilated area

**NOTE OF CAUTION:** Edges of damping material can be sharp. PLEASE wear hand protection and use caution when installing damping material.

# DRIVER SIDE WALL

## PLACEMENT OF DAMPING MATERIAL

STEP 1: Clean surfaces to make sure they are free of dirt, grease or contaminants. Peel the release liner off of damping material and press firmly in place by hand. (\*\*Be careful as the edges of the damping material can be sharp) Then take roller and roll material to ensure good adhesion.

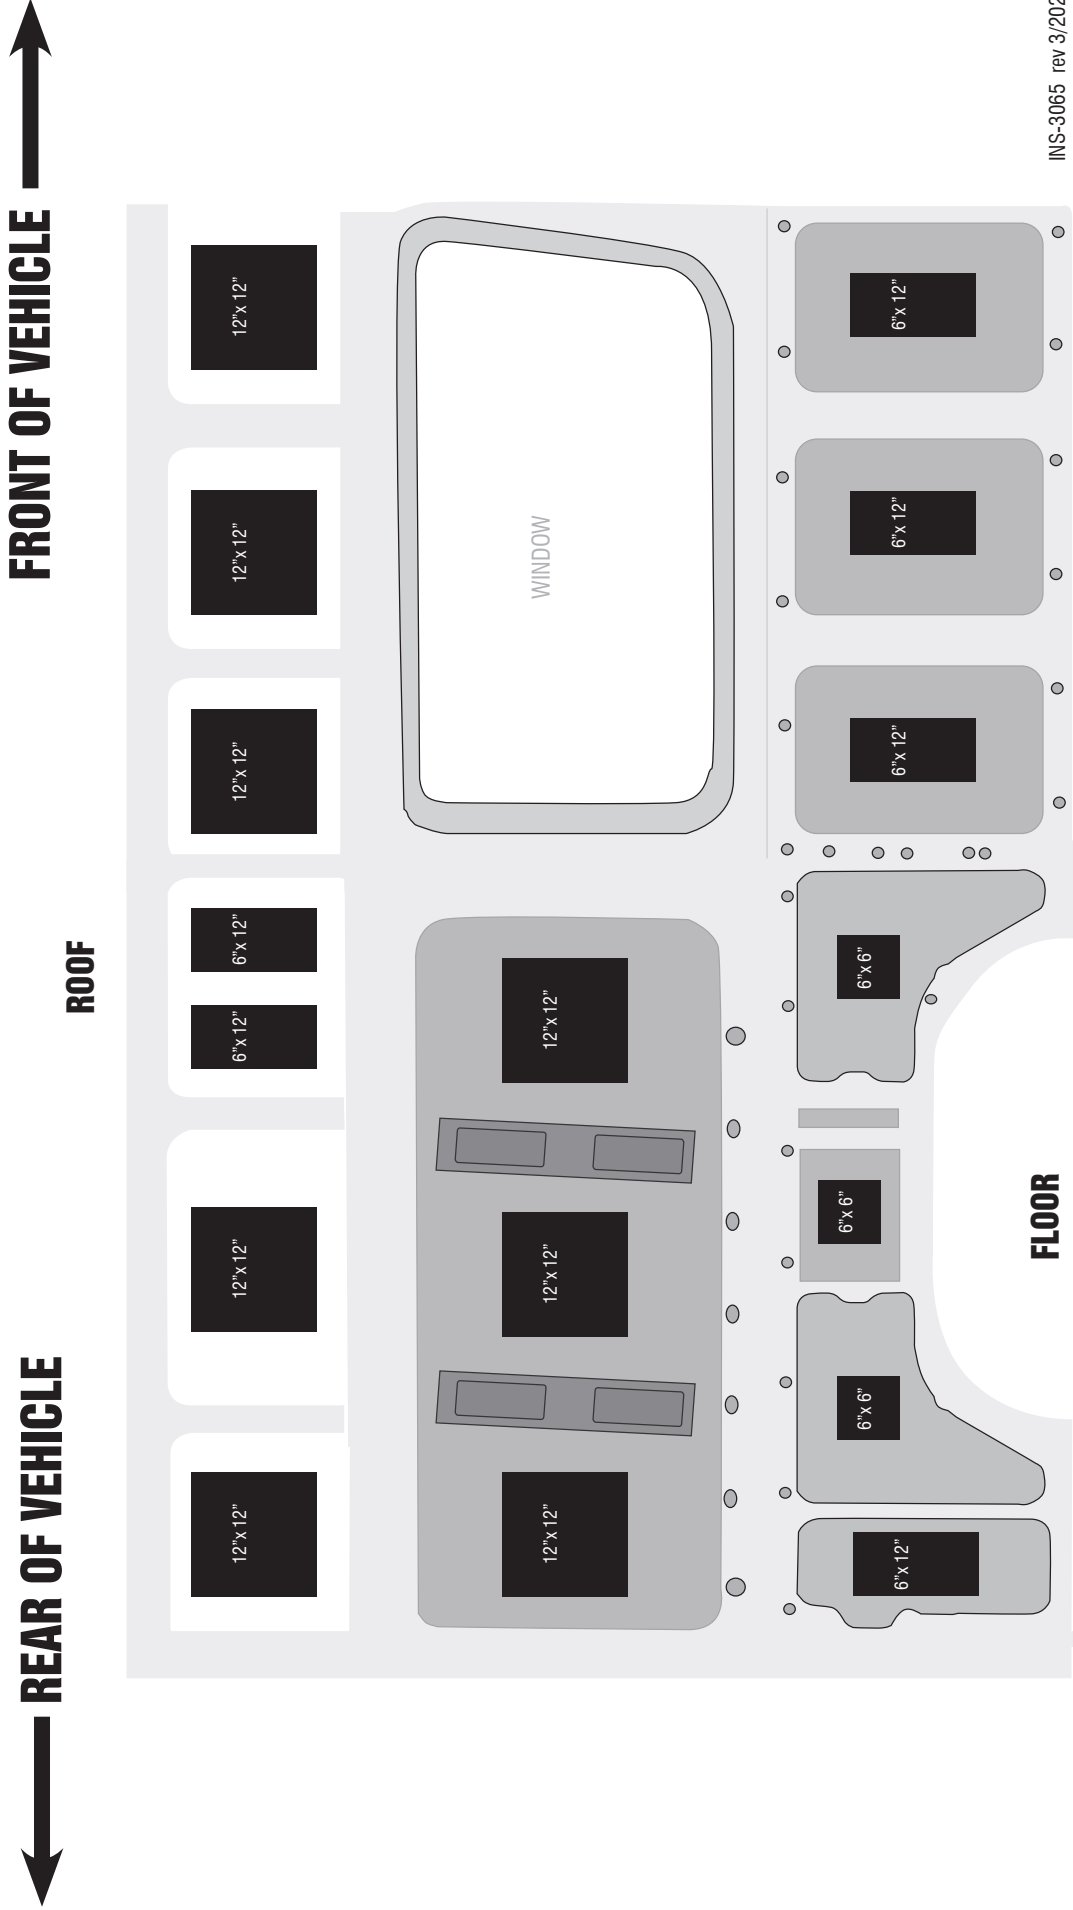


# PASSENGER SIDE WALL

## PLACEMENT OF DAMPING MATERIAL

STEP 1: Clean surfaces to make sure they are free of dirt, grease or contaminants. Peel the release liner off of damping material and press firmly in place by hand. (\*\*Be careful as the edges of the damping material can be sharp) Then take roller and roll material to ensure good adhesion.



ROOF

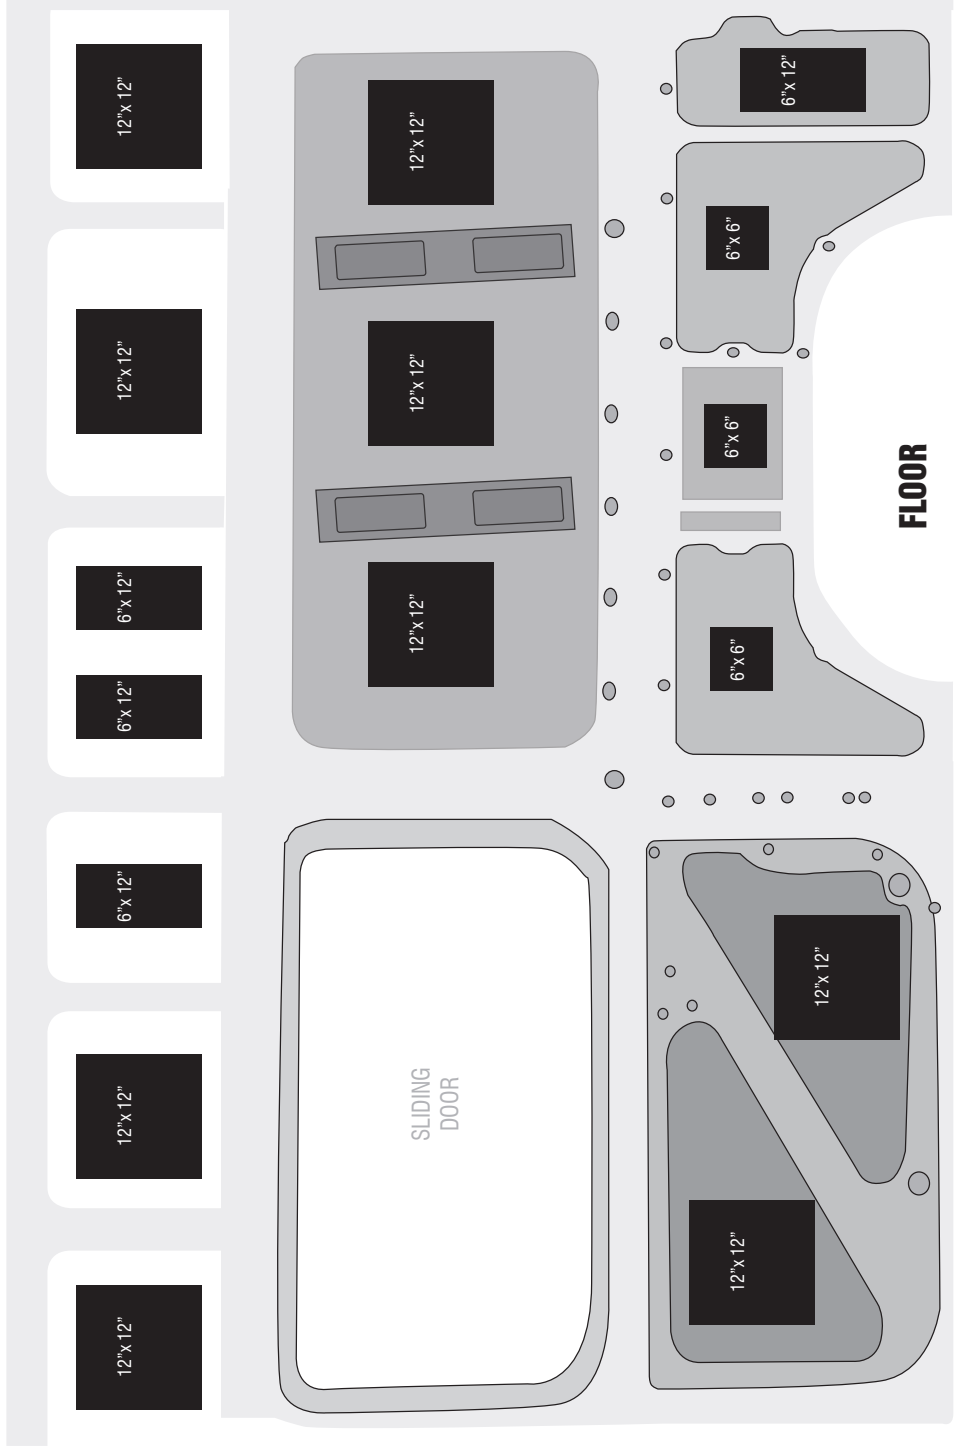

# ROOF


## PLACEMENT OF DAMPING MATERIAL

STEP 1: Clean surfaces to make sure they are free of dirt, grease or contaminants. Peel the release liner off of damping material and press firmly in place by hand. (\*\*Be careful! as the edges of the damping material can be sharp) Then take roller and roll material to ensure good adhesion.

← REAR OF VEHICLE

FRONT OF VEHICLE →

PASSENGER SIDE

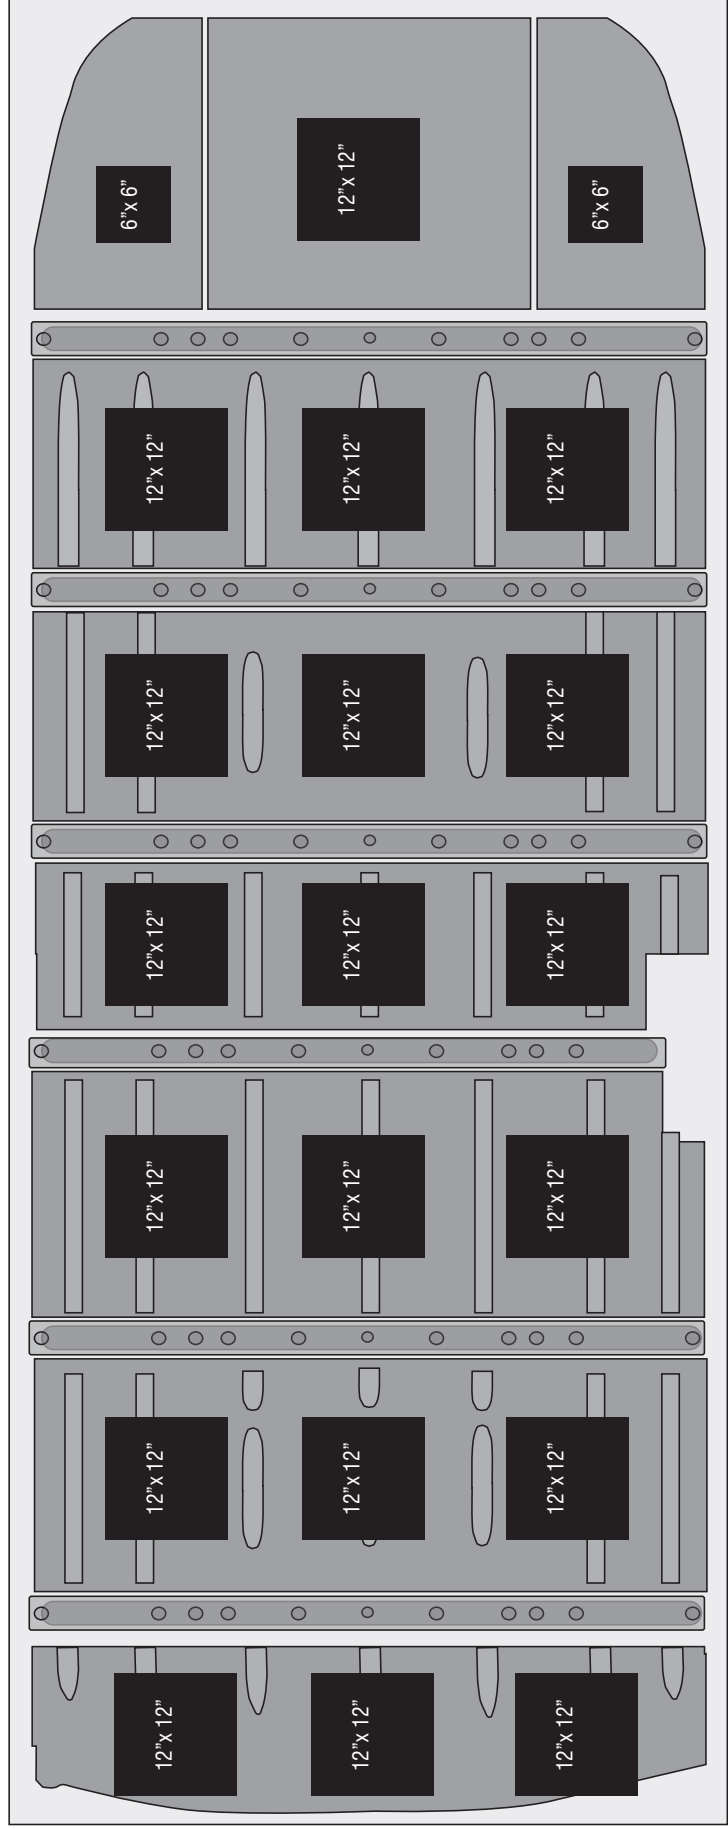


DRIVER SIDE


# REAR DOORS

## PLACEMENT OF DAMPING MATERIAL

STEP 1: Clean surfaces to make sure they are free of dirt, grease or contaminants. Peel the release liner off of damping material and press firmly in place by hand. (\*\*Be careful! as the edges of the damping material can be sharp) Then take roller and roll material to ensure good adhesion.

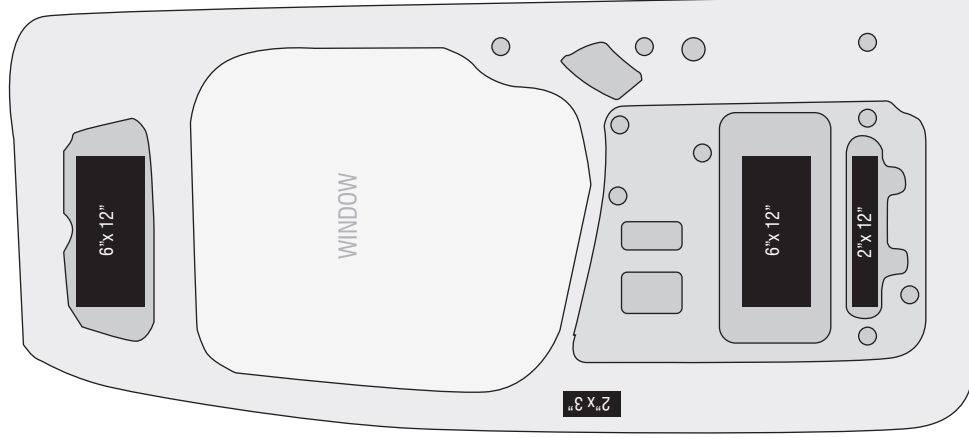

**PASSENGER SIDE**

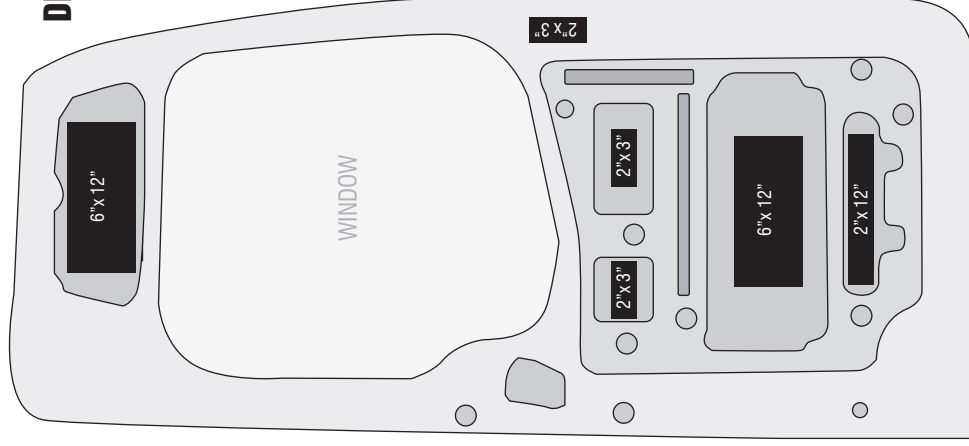

**DRIVER SIDE**